

DC/DC Converters

VTC600-MS Series DC/DC Converters



Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation



Military Option

Most of the products manufactured by Analytic Systems can be adapted for military use (Commercial Off The Shelf).

We provide four different levels of ruggedization; most often, a product in military use will use the extra-wide temperature range components to allow operation to -55 degrees Celsius.

The printed circuit boards are also protected against condensation and are enhanced with vibration protection that meets or exceeds MIL-STD810F, Method 514-3 and Cat-1 Proc 1.

C.O.T.S. products are designed to meet various levels of EMC radiated and conducted emissions MIL-STD 461E.

All C.O.T.S. products are manufactured in accordance with IPC-A-610.

Description

The VTC600-MS DC DC Converter provides up to 600 watts to power 12 or 24 Volt Military Electronics from a 20 – 40 VDC Source.

This all new single board design incorporates state of the art switchmode technology for unmatched efficiency and ultra-quiet operation. Multiple stages of filtering reduce radiated or conducted noise to very low levels. Extra features include adjustable output voltage, audible and visual indicators for low input voltage, low output voltage, over temperature and overload.

Safety features include reverse input protection, over-temperature shutdown, current limiting, short circuit shutdown, a dry contact alarm relay output and output overvoltage crowbar. Optional features include a remote panel monitoring with On-Off control. We are confident that you will get many years of reliable service from this Voltage Converter.


NATO STOCK NUMBER #NSN-6130-20-000-8980

Features

- Adjustable output voltage
- Audible & visual indicators for constant current, low input voltage, low output voltage & over-temperature
- Extremely rugged and well suited for marine and other demanding environments
- High tolerance for shock and vibration
- Ultra-quiet low EMI operation
- Current limiting protection
- Reverse input protection
- Output over-voltage crowbar
- Dry contact output fail relay
- Remote control option
- Wide-Temperature operation Available
- Parallel output diodes available
- MIL Environment Package Standard
- 3 year parts and labour warranty

VTC600-MS Series DC/DC Voltage Converter

Mechanical Diagram

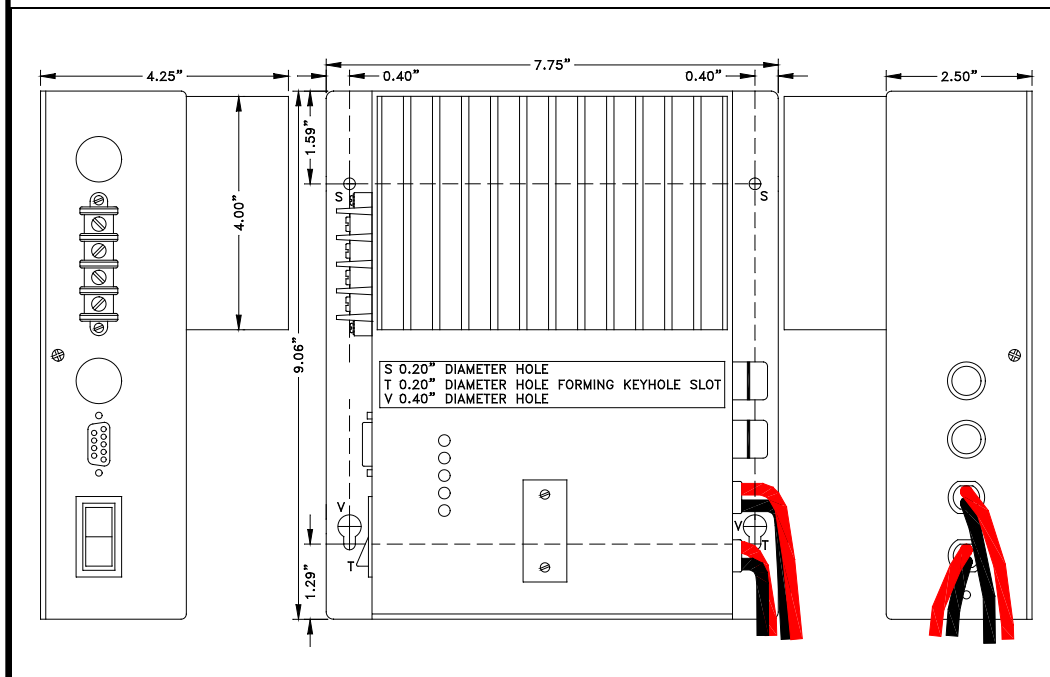

Specification

Electrical (Input)

Model Number	VTC600-32-12	VTC600-32-24
Input Volts (DC)	20 – 45	30 – 45
Input Amps (max)	42	40
Input Fuse (AGC)	25A x 2	
Noise on Input	< 50 mV	

Environmental Specification

Operating Temp. Range	-40° to +55°C @ maximum output Derate Linearly 2.5% per °C from 55°C to 85°C
Humidity	0 - 95°C Relative Humidity (non-condensing) with optional conformal coating
Audible Noise	NONE Ødb @ 3 ft
Typical Service Life	> 10 yrs. (87,600 hrs)
Isolation	Any Input or Output to Case 500 VDC Input to Output – Common Negative

Electrical (Output)

Output Nominal (op)	12	24
Output Volts (DC)	13.6 ± 0.05	27.2 ± 0.05
Output Amps	50 cont./ 55 peak	35 cont. / 40 peak
Output Adjustment	± 0.5	
Output Crowbar	16.0 ± 0.5V	32.0 ± 1.0V
Output Ripple & Noise	< 50 mV	
Transient Response	< 1V for 50% Surge	
Regulation (Line & Load)	< +/- 0.5%	
Duty Cycle	Peak 20% for 10 min maximum Continuous 100% for 24 hours per day	
Efficiency	> 90% @ Maximum Output	

Mechanical Specification

Length	9.1 in / 23.1 cm
Width	7.8 in / 19.8 cm
Height	4.3 in / 10.9 cm
Material	Marine Grade Aluminium
Finish	Black Anodize / Powder Epoxy Coat
Fastenings	All 18-8 Stainless Steel
Weight	6.0 lb / 2.7 kg
Connections	#10 AWG Input Wires (Positive & Negative) Four contact output terminals
Warranty	3 years

Available From:

ANALYTIC SYSTEMS
INNOVATIVE POWER CONVERSION SOLUTIONS

ISO 9001:2008 Certified Quality System